


AUTOMATIC UTILITY PUMP

APPLICATIONS

Ideal for general water transfer applications and household water removal in places like basements, crawl spaces, rooftops, and other areas where automatic operation is required. This pump activates in three minute intervals to detect if water is present. If water is present, pump will continue to operate until water is removed.

FEATURES & BENEFITS

- Automatic submersible 115 Volt utility pump
- Reinforced engineered thermoplastic construction
- Technologically advanced switch for automatic operation
- Checks for water every three minutes
- Screened bottom intake design removes water within 3/4" of surface or 1/4" of surface without the screen
- Includes garden hose adapter

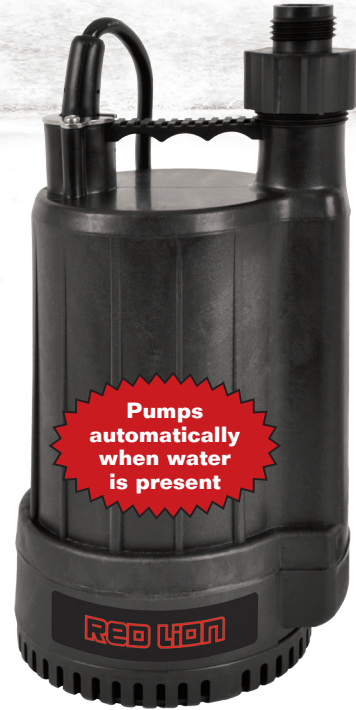

Model	Item Number	UPC	HP	Amps	Volts	Discharge	Intake	Cord Length	Gallons Per Hour at Height				Shut-Off
									0'	5'	10'	15'	
RL-MP25A	14942735	0 10121 14158 2	1/4	2.0	115	1-1/4" MNPT 3/4" GHT	Screened Bottom	10'	2200	1920	1440	900	22'

Carton Specifications

Model	Length	Width	Height	Weight (lbs)	Carton Cubes (cu ft)	Pallet Quantity	Qty. per Layer	Layers per Pallet
RL-MP25A	6.5"	6.25"	11.75"	7.5	0.28	168	42	4

Automatic Utility Pump

